
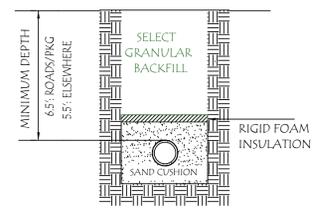



**Effluent Pumping System with Drain-Back System**

Materials and information for this system are available from Wastewater Technologies, Inc. (802) 895-2407

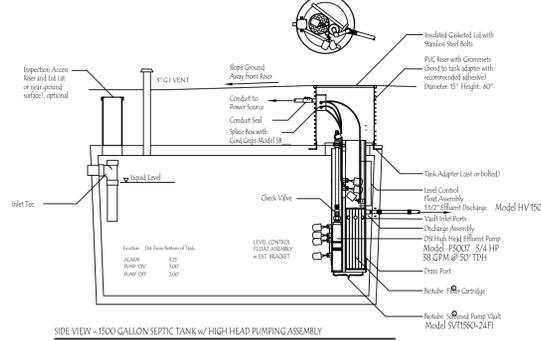

**PIPE TYPICAL TRENCH NOTES**





1. PIPE SHALL BE FREE OF DEFECTS AND SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S AND ENGINEER'S SPECIFICATIONS.
2. THE PIPE SHALL BE INSTALLED IN ACCORDANCE WITH THE GRADE AND DEPTH SHOWN ON THESE DRAWINGS. NO VARIATION WILL BE PERMITTED WITHOUT THE AUTHORIZATION OF THE PROJECT ENGINEER.
3. AFTER EXCAVATING THE TRENCH TO THE REQUIRED DEPTH, THE PIPE WILL BE BEDDED AS SHOWN IN THE DETAIL BELOW. BEDDING MATERIAL WILL BE PLACED AROUND THE ENTIRE LENGTH OF THE PIPE BARREL TO PROVIDE UNIFORM SUPPORT.
4. AFTER PLACEMENT OF THE PIPE AND BEDDING, THE TRENCH WILL BE BACK-FILLED WITH CLEAN GRANULAR MATERIAL THAT IS FREE OF ANGULAR OR LARGE STONE (4" MIN. DIMENSION) WITHIN 12" OF THE PIPE. BACKFILL MATERIAL WILL BE COMPACTED IN 12" LAYERS WITH A PORTABLE VIBRATORY UNIT.
5. AFTER BACKFILLING, THE PIPE WILL BE SUBJECTED TO THE PRESSURE TEST OF 50 PSI AT THE HIGHEST POINT IN THE LINE.
6. IF SUFFICIENT COVER IS NOT AVAILABLE, OR IF THE PIPE WILL PASS UNDER A TRAVELED AREA, RIGID FOAM INSULATION WILL BE USED AS SHOWN.

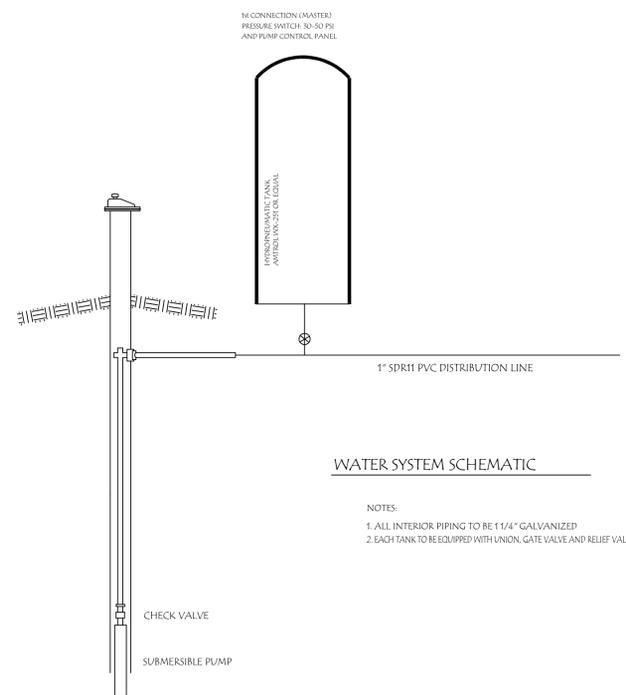

**WATER SYSTEM SCHEMATIC**

NOTES:

1. ALL INTERIOR PIPING TO BE 1/4" GALVANIZED
2. EACH TANK TO BE EQUIPPED WITH UNION, GATE VALVE AND RELIEF VALVE

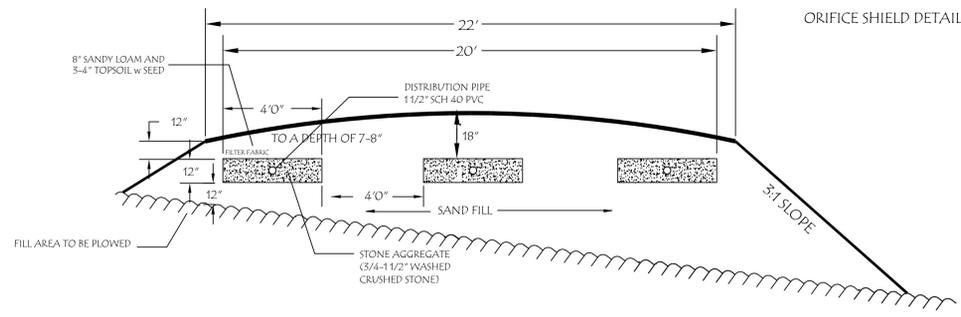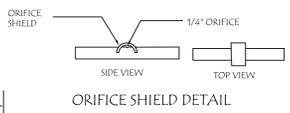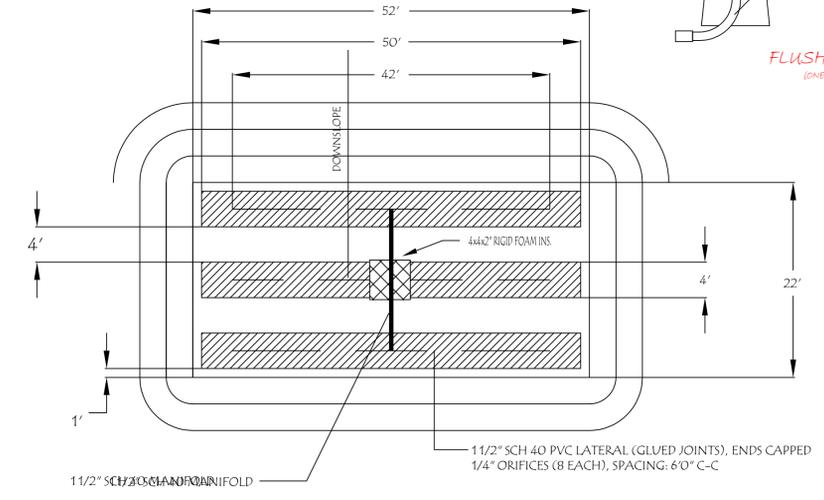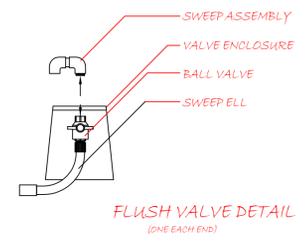

**ANDREW D. ZINS**  
 WATER & WASTEWATER DETAILS 1654 PRINDLE ROAD  
 CHARLOTTE, VERMONT DWG. 2 OF 2 11/09/2017



**JH STUART ASSOCIATES**  
 22 TANGLEWOOD DRIVE P.O. BOX 8367  
 ESSEX, VERMONT 05451 802-878-5171 jhstuart@comcast.net